

REMARKS

The specification of the subject U.S. patent application, as filed, as constituted by the verified translation of PCT/DE2003/002651, has been cancelled in favor of the concurrently presented Substitute Specification. A suitable Abstract of the Disclosure has been added. These changes and additions do not constitute any new matter.


Original claims 1-29, replacement claims 1-6 and 19-26 and further replacement claims 1-26 have all been cancelled. New claims 30-54 have been presented. New claims 30-54 are essentially the same, in scope, as the claims that are now pending in the PCT application. They have been rewritten in a form more in accordance with U.S. practice and eliminating multiple dependencies.

Entry of this Preliminary Amendment into the file of the subject U.S. patent application, prior to the calculation of the filing fee, and prior to an examination of the application on the merits is respectfully requested.

Respectfully submitted,

Kurt Johannes WESCHENFELDER
Karl Robert SCHÄFER
Georg SCHNEIDER
Applicant

JONES, TULLAR & COOPER, P.C.
Attorneys for Applicant

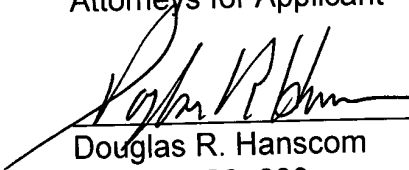

Douglas R. Hanscom
Reg. No. 26, 600

February 18, 2005
JONES, TULLAR & COOPER, P.C.
P.O. Box 2266 Eads Station
Arlington, Virginia 22202
(703) 415-1500
Attorney Docket: W1.2160 PCT-US

ABSTRACT OF THE DISCLOSURE

A dressing is pressed against a surface of a cylinder of a printing machine by the use of pressing elements. Several such dressings may be arranged next to each other in the axial direction of the cylinder. The pressing elements, used in connection with one of the plurality of dressings, are operable independently of other pressing elements that are used in connection with other ones of the dressings. These pressing elements may be provided as roller elements. Additional pressing elements are located, spaced in a circumferential direction of the cylinder, from the other pressing elements. Those additional pressing elements may be positioned before, in a direction of cylinder rotation, the other pressing elements.

[WO 2004/020198]

[PCT/DE2003/002651]

[Specification]

MARKED-UP COPY OF SPECIFICATION

WESCHENFELDER, SCHÄFER, SCHNEIDER: W1.2160 PCT-US

**DEVICE AND METHOD FOR PRESSING A DRESSING[TYMPAN] TO A
CYLINDER OF A PRINTING MACHINE BY USE[MEANS] OF PRESSING
ELEMENTS**

CROSS-REFERENCE TO RELATED APPLICATIONS

[001] This U.S. patent application is the U.S. national phase, under 35 USC 371,
of PCT/DE2003/002651, filed August 7, 2003; published as WO 2004/020198 A2
and A3 on March 11, 2004, and claiming priority to DE 102 38 177.1, filed August
21, 2002, the disclosures of which are expressly incorporated herein by reference.

FIELD OF THE INVENTION

[002] The present invention is directed to[relates] a device and to a method for
pressing a dressing against a cylinder of a printing press with the aid of pressing
elements [in accordance with the preamble of claims 1, 16 or 20]. The pressing

elements are operable independently of each other. Several dressings are arranged side-by-side in an axial direction of the cylinder.

BACKGROUND OF THE INVENTION

[003] A device and a method for pressing a dressing against a cylinder of a printing press with the aid of a pressure strip extending along the cylinder₁ and having several segments each embodied in the form of a die is known from DE 101 20 134 A1. Several[, wherein several] dressings are arranged side-by-side in an[the] axial direction of the cylinder. The[, and the] segments of the pressure strip associated with a dressing can be selectively actuated.

[004] A device for use in pressing a dressing against a cylinder of a printing press₁ with the aid of several rolling elements, in particular with the aid of several rollers[, arranged along the cylinder₁ is known from EP 0 712 725 A2.

[005] WO 01/87613 A1 describes a method and several embodiments of a device for pressing a dressing against a cylinder of a printing press. Several[, wherein several] rollers are pressed against the cylinder by an actuating assembly[means]

during mounting and dismounting of a dressing. The actuating assembly[means] can be configured[designed] as a reversibly deformable hollow body, such as, for example a tube, which can be charged with a pressure medium. By charging the hollow body with the pressure medium, a rigid roller support, which is [substantially] embodied substantially in the form of a die, is pressed against the cylinder, against the force of a spring. In one preferred[exemplary] embodiment, the roller support is embodied either as a rocker or as a one-armed lever. In addition to the first rollers, which are spaced apart from each other and which can be placed against the cylinder for mounting fresh or new dressings, another preferred[exemplary] embodiment of this prior device provides a plurality of second rollers, which second rollers can be placed against the cylinder for use in dismounting dressings. Two actuating assemblies[means], which can be operated independently of each other, can be provided for placing the first and second rollers against the cylinder.

[006] A device for use in pressing a dressing against a cylinder of a printing press, with the aid of first and second rolling elements which are arranged one

behind the other in the circumferential direction of the cylinder, is known from DE 196 39 800 C1. The first and second[, wherein the] rolling elements can only be placed against or moved away from the cylinder together in this prior device.

[007] A device for use in mounting flexible printing plates is known from DE 197 19 559 A1. A[, wherein a] pressure roller is arranged on a holder which is embodied, for example, as a leaf spring. The[, wherein the] holder is connected with an insertion slider. The[, wherein the] insertion slider can be placed against a forme cylinder by [means of]a linear movement and, in the process, introduces an end of the printing plate into a fastening slit cut into the forme cylinder.

[008] A device for use in accomplishing the automatic feeding of printing plates to a cylinder is known from USP 5,406,888. Two[, wherein two] rolling elements, arranged one behind the other in the circumferential direction of the cylinder, are arranged on a rigid lever which can be jointly pivoted against the cylinder. One of the two[, wherein one] rolling elements is arranged at[in] the pivot point of the lever.

[009] A manipulating device for use in automatically mounting or dismounting

printing plates on a cylinder is known from USP 4,727,807. A[, wherein a] gripper of the manipulating device has two rolling elements which are arranged one behind the other, in the cylinder circumferential direction, in a common frame.

SUMMARY OF THE INVENTION

[010] The object of the present invention is directed to providing[based on creating] devices for use in pressing a dressing on a cylinder of a printing press with the aid of first and second rolling elements, which first and second rolling elements are spaced apart from each other in the circumferential direction of the cylinder, and to a method for tightening or bracing or for slackening or removing such a dressing.

[011] In accordance with the present invention, this object is attained by the use of pressing elements which are usable to contact one or the other of several dressings that are arranged side-by-side in the axial direction of a cylinder on which they are positioned. Pressing elements assigned to one dressing can be placed against that dressing, or moved away from it independently of other pressing

elements assigned to another dressing. The pressing elements can be rolling
elements. Cooperating pressing elements for a dressing can be spaced
circumferentially in a direction of rotation of the cylinder[means of the
characteristics of claims 1, 5, 10, 22, 31 or 36].

[012] The advantages to be gained by [means of]the present invention consist₁ in
particular₁ in that the device can be constructed to be very flat, and therefore is
configured in a space-saving manner, which is very advantageous because[in view]
of the existing structural conditions of a printing press. A preferably layered
arrangement of the supports for the dressing elements results in that the device
can also be constructed in a very compact manner in the circumferential direction
of the cylinder. In[, because in] spite of the use of[using] rolling elements, which are
arranged one behind the other in the circumferential direction of the cylinder, the
total of two lever arms placed in series is not required as the structural space. Such
required structural space is[, but] only slightly more than the length of one lever
arm.

[013] Furthermore, the device in accordance with the present invention is resistant

to dirt and is more rugged than an arrangement configured with supports attached to a hinge, for example. Such a, because the] hinge₁ at the intended installation location₁ must be protected against soiling, such as by ink splatters or dust, to facilitate its[for] interference-free functioning, which protection entails an additional outlay.

[014] The[Because the] supports for the rolling elements in the present invention are configured[designed] as an elastically bendable body. In, in] the course of [the]interaction₁ with the actuating device[means] acting on the support₁ no separate spring element is required for use in returning the supports into their initial position after an operation of the actuating device. This is[means,] because the support has an inherent spring-back property.

[015] In addition to the fact that by the use[means] of the [proposed]arrangement of the supports and rolling elements, in accordance with the present invention, that a very flat structural shape is achieved, other functional advantages arise from the tandem arrangement of the rolling elements. Thus, dressings resting on the surface area of the cylinder can remain fixed in place as needed by use[means] of

the first rolling element, although the second rolling element also releases an end of a dressing or ends of several dressings, i.e. does not press them on at this time.

If, with[in] respect to a particular dressing, the first and the second rolling elements are placed against the cylinder, advantageous friction values and guide conditions result for delivering and transporting this dressing.

[016] A further advantage of the device in accordance with the present invention is the easy accessibility of the actuating assembly[means] for use in pressing dressings against a cylinder. This ease of accessibility[, which] is of particular importance if a large number[amount] of rolling elements, with their supports, are[is] to be placed against, and moved away from the cylinder independently of each other.

BRIEF DESCRIPTION OF THE DRAWINGS

[017] Preferred[Exemplary] embodiments of the present invention are represented in the drawings and will be described in greater detail in what follows.

[018] Shown are in:

Fig. 1, a schematic depiction of a side elevation view of a device for pressing a dressing against a cylinder of a printing press with the aid of rolling elements in accordance with the present invention, in

Fig. 2 to Fig. 4, schematic side elevation views showing the progression of a method for bracing or tightening a flexible dressing on a cylinder of a printing press with the aid of rolling elements which are arranged on elastically bendable supports, all in accordance with the present invention, in

Figs. 5 and 6, schematic side elevation views and showing a method step utilized when releasing a flexible dressing from a cylinder of a printing press with the aid of rolling elements arranged on elastically bendable supports, and in

Fig. 7, a schematic depiction of one arrangement of an assignment of separate ones of rolling elements, arranged on second supports, to several dressings applied side-by-side on a cylinder while one of these dressings is being removed, all in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[019] Referring initially primarily to Fig. 1, a[A] dressing 01 is brought to a cylinder 02 of a printing press, for example to a cylinder 02 of a web-fed rotary offset printing press by suitable apparatus, which is not specifically shown. The dressing 01 can be, for example, a flexible dressing, and, in particular, can be an elastically flexible printing forme 01, which is to be placed on a forme cylinder 02. A suspension leg 03a, which is beveled or angled off at a leading end of the dressing 01, is suspended, and preferably is positively connected, to [at]a cooperatively configured[correspondingly embodied] first wall 04 of a preferably slit- shaped opening 07 that is cut into or is otherwise provided in a[the] surface area 06 of the cylinder 02. If the dressing 01 extends over the entire circumference of the cylinder 02, a single such opening 07, as depicted in Fig. 1, in the cylinder 02 may[can] be sufficient[(Fig. 1)]. In a situation[case] of several dressings 01, which are to be applied in the circumferential direction of the cylinder 02, several, preferably identically configured[designed] openings 07 are located in the cylinder 02 in an arrangement where these several axially extending, essentially identical openings

07[they] are offset along the cylinder circumference. With two dressings 01 situated in the circumferential direction of cylinder 02, the two required openings 07 are arranged circumferentially offset by 180° with[in] respect to each other, for example. In this case of two dressings 01, a suspension leg 03a at the leading end of the one dressing 01 is fastened in the first opening 07, as seen in Fig. 1 while a suspension leg 03b at the trailing end of the same dressing 01 is fastened in the other opening 07, which is [(not specifically represented in Fig. 1)]. With a 6/2 printing press, the preferred arrangement of dressings consists of two dressings 01 in the circumferential direction of the cylinder 02, and six side- by-side arranged dressings 01 in the axial direction of the cylinder 02.

[020] The opening 07 in the cylinder circumferential surface area 06 leads to a channel 08 that is extending axially along the cylinder 02, and in which channel 08 a plate end holding device, for example a clamping device, is located, which plate end holding device[substantially] consists substantially of a holding member[means] 12, that is pivotably seated in a groove 11 on the bottom 09 of the channel 08, as well as of a spring element 14 clamped between a wall 13 of the

channel 08 and the holding member[means] 12, as seen in [(Fig. 1)]. The holding member[means] 12, which is advantageously embodied as a rigid lever, is pivotable, counter to, or against, the force of the spring element 14, by an actuating device[means] 16 which is also supported in the channel 08 and which actuating device 16 is usable for releasing a clamped connection provided by the holding member[means] 12 on the second wall 17 of the opening 07. Thus, the holding member[means] 12 has a holding position as its operating position, which holding position, in particular, is a clamping position, and also has a release position. Such a clamping device is described, for example in DE 100 58 996 C1, and which corresponds to U.S. 2004/050276. For the purpose of explaining further details of the clamping device and its function, reference is expressly made to the above mentioned document, whose disclosure is expressly incorporated herein by reference.

[021] A holder 21, such as, for example a cross arm 21, and which is extending along in the axial direction of cylinder 02, is provided in the vicinity of the cylinder 02 and is spaced at a distance from the cylinder 02. A, wherein a] device for use in

pressing a dressing 01 against the cylinder 02 of the printing press, with the aid of pressing elements 31, 32, preferably rolling elements 31, 32, is arranged on the holder 21. These plural, spaced[, wherein the] rolling elements 31, 32, as may be seen in Fig. 7, can be placed against the cylinder 02, or can be moved away from it. A first support 22 with a first support first end 23 and with a first support second end 24;[,] and a second support 26, with a second support first end 27 and with a second support second end 28, are provided on holder 21. In[here, wherein in] one embodiment, the first end 23 of the first support 22 is fixedly connected with the cross arm or holder 21 that is extending axially along, and spaced from, the cylinder 02. At least one first rolling element 31 is arranged on the second end 24 of the first support 22. The first end 27 of the second support 26 is also connected with the first support 22, preferably with the[its]second end 24 of the first support 22, as seen in Fig. 1, and preferably in a fixed manner. The[, wherein the] first support 22 and the second support 26 are substantially arranged layered one on top of the other. The[, wherein the] first end 27 of the second support 26 preferably terminates flush with the second end 24 of the first support 22. At least one second

rolling element 32 is arranged on the second end 28 of the second support 26. The first rolling element 31 and the second rolling element 32 are thus arranged spaced apart from each other, and are positioned one behind the other in the circumferential direction of the cylinder 02. As [so that, as] can be seen in all of the drawings, a so- called double-roller or tandem roller arrangement results. The term tandem roller arrangement in this context indicates that two substantially identical structural components, comprised here of the first and second pressing elements or rolling elements 31 and 32, respectively, are arranged one behind the other in the circumferential direction of the cylinder 02.

[022] For use in placing the rolling elements 31, 32 against the cylinder 02 or for moving them away from it, a first actuation device[means] 33₁ acting on the first element 22₁ and a second actuating device[means] 34₁ acting on the second support 26₁ are provided. The[, wherein the] first actuating device[means] 33₁ and the second actuating device[means] 34 can be actuated independently of each other. The achievement of such an independent placement of the rolling element 31, 32 against or away from the cylinder, by use of the independently operable

actuating devices 33, 34 is of particular benefit[advantage] when several dressings 01 have been arranged side-by-side in the axial direction on the cylinder 02, and it is intended to selectively clamp or to release these dressings 01 individually.

During[For example, during] the removal of a single dressing 01, for example, the remaining dressings 01 can be securely maintained on the cylinder 02 by the use[means] of rolling elements 31, 33 appropriately placed against them[,]. This secure dressing position maintenance can be maintained even if a common holding member[means] 12 of a holding device, which holding member 12 is [mutually] arranged for concurrently holding several dressings 01, is opened and thus releases the fastening of several of the dressings 01 situated on the cylinder 02.

[023] The two actuating devices[means] 33, 34 are each embodied, for example, in the form of a reversibly deformable hollow body, such as, for example [as] a tube 33, 34, which tube 33, 34 can be charged with a pressure medium. For example, the first actuating device 33, [means] acting on the first support 22, can be supported on a rigid stop 29, which is fixedly connected with the cross arm 21 or which has been formed on it, since the first actuating device[means] 33, in

particular₁ is arranged between the cross arm 21, or between the stop 29, and the first support 22. The[, while the] second actuating device[means] 34₁ acting on the second support 26₁ is preferably arranged between the first support 22 and the second support 26 and is preferably supported on the first end 23 of the first support 22, which first end 23 of first support 22 is connected with the cross arm 21. It is advantageous to embody the second support 26 to be longer than the first support 22. This results in an excess projection of second support 26[, and this] with such an excess projection being sufficient in length that the second rolling element 32₁ arranged on the second end 28 of the second support 26₁ can be positioned laterally with[in] respect to the cross arm 21 during the non-actuated state of the second actuation device[means] 34, and[but] preferably without the second rolling element 32 touching the cross arm 21.

[024] It is of particular advantage to embody each of the supports 22, 26 in the form of an elastically bendable, preferably[i.e.] reversibly deformable body, and in particular₁ in the shape of a blade, for example as a resilient sheet metal piece 22, 26. If, by operating a[n] one of the associated actuating devices[means] 33, 34, an

associated one of the[a] supports 22, 26 can be elastically bent, for placing a rolling element 31, 32 against the cylinder 02, no additional devices[means] are required for moving the rolling elements 31, 32 arranged on the supports 22, 26 away from the cylinder after an actuation of the associated actuating device[means] 33, 34 has ceased. In this preferred embodiment, the supports 22, 26 each spring back into their original positions without the further imposition[cooperation] of forces acting from the outside.

[025] The rolling elements 31, 32 can each be embodied as a roll 31, 32 or as a roller 31, 32. Several such[Also, several] first supports 22, each with at least one first rolling element 31, can be arranged side-by-side on the cross arm 21, in the axial direction of cylinder 02, wherein these first rolling elements 31 can each be placed against or can be moved away from the cylinder 02 independently of each other. Such movement of the several axially side-by-side arranged first rolling elements 31 can either be accomplished individually or in groups by the appropriate actuation[means] of the first actuating device[means] 33 assigned to each of the[their] supports 22. In the same way, it can be advantageous to arrange several

second supports 26, each with at least one second rolling element 32, side-by-side axially with respect to cylinder 02 on the first support 22. These second[, wherein these] rolling elements 32 can be placed against or can be moved away from the cylinder 02 independently of each other also either individually or in groups by the appropriate actuation[means] of the second actuating device[means] 34 assigned to each of the[their] supports 26. A preferred embodiment of the present invention provides that one first[a] roller 31, extending axially along the cylinder 02, and that several second supports 26, each with at least one roll 32, are arranged on the first support 22. This embodiment becomes particularly useful in the case where the cylinder 02 has several dressings 01 located side-by-side on its cylinder surface area 06, and a second support 26, each with at least one second rolling element 32, is assigned to each dressing 01.

[026] In accordance with a further preferred[exemplary] embodiment of the present invention, the device for pressing a dressing 01 against a cylinder 02 of a printing press can be configured[designed] in such a way that a plurality of dressings 01 can be arranged on the cylinder 02 side-by- side in the axial direction,

wherein first and second pressing elements 31, 32, assigned to a first dressing 01, can be placed against, or can be moved away from a cylinder 02 independently of first and second pressing elements 31, 32 assigned to another dressing 01. This[, wherein this] device is distinguished in that the first and second pressing elements 31, 32 are embodied as rolling elements, and in particular are embodied as rollers 31, 32. In this case, the first and second pressing elements 31, 32, or the first and second rolling elements 31, 32 can be placed against the cylinder 02 at least intermittently during its rotation. Or, the device for pressing a dressing 01 against a cylinder 02 of a printing press with the aid of rolling elements 31, 32 can have[has] several first rolling elements 31, as well as several second rolling elements 32 located in the axial direction of the cylinder 02. The[, wherein the] second rolling elements 32 are arranged spaced apart, in the circumferential direction of the cylinder 02, from the first rolling elements 31. This case is also distinguished in that individual ones of the second rolling elements 32, or groups of the second rolling elements 32, can be placed against the cylinder 02, or can be moved away from it, independently of individual ones or groups of first rolling elements 31. It is also

possible to place all of the first rolling elements 31 against the cylinder. Selected
ones of the[, and the] second rolling elements 32 can be [partly]placed against or
can be moved away from the cylinder 02.

[027] From a review of the sequence of operation depicted in Figs. 1 to 4, it is
possible to understand[infer] a method for bracing or for tightening a flexible
dressing 01 on a cylinder 02 of a printing press in accordance with the present
invention, and with the aid of the first and second rolling elements 31, 32, which are
arranged, spaced apart in the circumferential direction of the cylinder 02 and which
are supported at ends of the supports 22, 26, which are preferably elastically
bendable. The[, wherein the] dressing 01 has suspension legs 03a, 03b beveled off
its ends, and[wherein] the cylinder 02 has an opening 07 cut into its surface area
06, which opening 07[and] has a first wall 04 and a second wall 17. The[, wherein
the] opening 07 leads to a channel 08 which is provided with a holding device
including[with] a holding member[means] 12 arranged therein. Channel 08 is
arranged extending axially in the cylinder 02. The[, wherein the] holding
member[means] 12 of the holding device has a holding position and a release

position as its operating positions. The[, which] method in accordance with the present invention is distinguished by the following method steps:

[028] While the first and second rolling elements 31, 32 are all moved away from the surface area 06 of the cylinder 02, a[the] suspension leg 03a located at the leading end of the dressing 01 is brought, preferably tangentially, against the surface area 06 of the cylinder 02 and is suspended on the first wall 04 of the opening 07 that is cut into the surface area 06 of the cylinder 02, as may be seen in Fig. 1.

[029] Thereafter, the rolling elements 31, 32 are placed against the cylinder 02 by operating the actuating devices[means] 33, 34, which actuating devices 33, 34 are acting on their respective supports 22, 26. This step of the method is depicted in Fig. 2.

[030] In the next step[Afterwards], as shown in Fig. 3 and also in Fig. 4, the cylinder 02 is rotated in the production direction P sufficiently far so that the suspension leg 03b on the trailing end of the dressing 01 rests on the second wall 17 of the cylinder opening 07[latter], or on an identically embodied second wall 17

of a second cylinder opening 07, which second cylinder opening 07 is arranged on the circumference of the cylinder 02 and is offset circumferentially with[in] respect to the first opening 07. The first and second[, wherein the] rolling elements 31, 32 press the dressing 01 against the surface area 06 of the cylinder 02.

[031] The second rolling element 32, which is located nearest the trailing end of the dressing 01, as seen in Figs. 3 and 4, presses the suspension leg 03b into the opening 07, and the holding device[means] 12 holding the trailing suspension leg 03b of the dressing 01 changes from its release position, shown in Figs. 3 and 4, to its holding position, shown in Figs. 1 and 2.

[032] Thereafter the rolling elements 31, 32 are moved away from the cylinder 02. These rolling elements 31, 32 move away from the surface area 06 of cylinder 02 by deactivation of the actuating devices 33, 34. Once these actuating devices 33, 34 are no longer supplied with a fluid under pressure, they return to their deactivated states, as seen in Fig. 1. The rolling elements 31, 32 move away from cylinder 02 because of the resilient nature of their associated supports, 24, 26, respectively.

[033] A method for releasing a flexible dressing 01 from a cylinder 02 of a printing press in accordance with the present invention, with the aid of rolling elements 31, 32 arranged on preferably elastically bendable supports 22, 26 is depicted in Figs. 5 and 6. A], wherein a] first rolling element 31 is arranged on a first support 22, and a second rolling element 32 is arranged on a second support 26. Both of these first and second], and both] rolling elements 31, 32 are arranged spaced apart from each other in the circumferential direction of the cylinder 02. Several], wherein several] dressings 01 can be arranged side-by-side in the axial direction on the cylinder 02. Each], wherein each] dressing 01 has suspension legs 03a, 03b beveled off its ends. The], wherein the] cylinder 02 has at least one opening 07 cut into its surface area 06 and this opening 07 has a first wall 04 and a second wall 17. The], wherein the] opening 07 leads to a channel 08 arranged extending axially in the cylinder 02 and with a holding device with a holding member[means] 12 arranged in channel 08. The[therein, wherein the] holding member[means] 12 of the holding device has a holding position and a release position as its operating positions. This method[.] is represented in Figs. 5, 6 and[to] 7 and is distinguished

by the following method steps:

[034] The rolling elements 31, 32 are each placed against one or against several dressings 01 resting on the surface area 06 of the cylinder 02.

[035] The cylinder 02 is rotated until the second rolling element 32₁ arranged on the second support 26₁ rests against the suspension leg 03b of the trailing end of a dressing 01 to be removed. This is shown in Fig. 4.

[036] The second rolling element 32 resting against the suspension leg 03b of the trailing end of the dressing 01 to be removed is now moved away from the cylinder 02 by deactuation of its actuating device 34, and the holding member[means] 12 changes into its release position, preferably by pivoting. This is shown in Fig. 5.

The[, whereupon the] suspension leg 03b at the trailing end of a dressing 01 to be removed from the cylinder 02 automatically springs out of the opening 07 because of its internal tension. The[, while the] suspension legs 03b at the trailing ends of further dressings 01, which are also resting on the cylinder 02₁ remain pressed on to the cylinder surface 06 by [means of]the other second rolling elements 32 pressing them against the second wall 17 of the opening 07. These other second

rolling elements 32 are not moved by the deactuation of the actuating device 34
associated with the second rolling element 32 moved away from its particular
dressing trailing suspension leg 03b.

[037] Thereafter, the holding member[means] 12 of the holding device preferably changes back into its holding position, and the cylinder 02 is rotated[rotates] counter to its production direction P until the suspension leg 03a at the leading end of the dressing 01 to be removed can be unhinged from the first wall 04 of the opening 07 and therefore can be removed from the cylinder 02.

[038] A method for releasing a flexible dressing 01 from a cylinder 02 of a printing press with the aid of rolling elements 31, 32 arranged on preferably elastically bendable supports 22, 26, in which[wherein] a first rolling element 31 is arranged on a first support 22, and a second rolling element 32 is arranged on a second support 26, in which[and] both rolling elements 31 are arranged spaced apart in the circumferential direction of the cylinder 02, in which[wherein] several dressings 01 can be arranged side-by-side, preferably in the axial direction, on the cylinder 02, in which[wherein] each dressing 01 has suspension legs 03a, 03b beveled off its

[WO 2004/020198]

[PCT/DE2003/002651]

ends, in which[wherein] the cylinder 02 has at least one opening 07 cut into its surface area 06 and the opening 07 has a first wall 04 and a second wall 17, [wherein the cylinder 02 has at least one opening 07 cut into its surface area 06 and has a first wall 04 and a second wall 17], in which[wherein] the opening 07 leads to a channel 08 arranged in the cylinder 02 with a holding device with a holding member[means] 12 arranged therein, and in which[wherein] the holding member[means] 12 of the holding device has a holding position and a release position as its operating positions, can also be distinguished by the following method steps:

[039] The first and second rolling elements 31, 32 have been moved away from all dressings 01 resting on the surface area of the cylinder 02.

[040] The cylinder 02 rotates until the second rolling elements 32 arranged on the second support 26 are located above the suspension legs 03b at the trailing ends of the dressings 01. These second rolling elements 32[, i.e.] are thus out of contact with the suspension legs 03b, but are still in their near vicinity.

[041] All of the[Then all] first rolling elements 31 arranged on the first support 22

are then placed against the cylinder 02, by [means of]which pressure, the dressings 01 are pressed against the surface area 06 of the cylinder 02 at a distance from their trailing ends [at a distance]corresponding to the distance between the first rolling element 31 arranged on the first support 22 and the second rolling element 32 arranged on the second support 26.

[042] The holding member[means] 12 of the holding device changes into its release position, preferably by pivoting. The[, whereupon the] suspension legs 03b at the trailing ends of all dressings 01 automatically spring out of the opening 07 because of their internal tension. This is depicted in Fig. 5.

[043] Except for their trailing ends, the dressings 01 remain fixed on the surface area 06 of the cylinder 02 because of the pressure exerted by the first rolling elements 31 placed against the cylinder 02.

[044] Except for those second rolling elements 32 located at the trailing end of a dressing 01 to be removed, now all of the second rolling elements 32 arranged on the second support 26 are placed against the cylinder 02. The[, so that the] suspension legs 03b at the trailing ends of all of the dressings 01 resting on the

cylinder 02, with the exception of the suspension leg 03b of the dressing 01 to be removed, are again placed against the second wall 17 of the opening 07 by the second rolling elements 32 pressing them against opening second wall 17[it].

[045] Thereafter, the holding member[means] 12 of the holding device changes into its holding position, and all of the first and second rolling elements 31, 32 are moved away from the cylinder 02.

[046] The[Now the] cylinder 02 now rotates counter to its production direction P until the suspension leg 03a at the leading end of the dressing 01 to be removed can be unhinged from the first wall 04 of the opening 07, and thus can be removed from the cylinder 02.

[047] Fig. 7 shows the assignment of spaced ones of a plurality of second rolling elements 32₁ arranged on several second supports 26₁ to several dressings 01 applied side-by-side to a cylinder 02 in the course of the removal of one of these dressings 01. In the example represented in Fig. 7, three such second rolling elements 32 are assigned to each[a] dressing 01. These second rolling elements 32 for each dressing 01 can be placed against the cylinder 02, or can be moved

away from the cylinder 02 independently of the remaining first and second rolling elements 31, 32, while adjoining dressings 01, for example, are maintained pressed against the surface area 06 of the cylinder 02 by those remaining first and second rolling elements 31, 32. Here, the first rolling element 31 is a continuous roller 31, while the second rolling elements 32 each consist[s] of several individual rollers 32. The first and second rolling elements 31, 32, respectively are arranged spaced apart from each other in the circumferential direction of the cylinder 02. The first roller 31, which forms the first rolling element 31, is in contact with all of the dressings 01 which rest side-by-side on the cylinder 02, while the trailing end of the dressing 01 to be removed is being loosened. With the previously described methods, the first and second rolling elements 31, 32, respectively are preferably placed against or are moved away from the cylinder 02 by pneumatically operable actuating devices[means] 33, 34.

[048] A further method for removing a flexible dressing 01 from a cylinder 02 of a printing press with the aid of rolling elements 31, 32, in which[wherein] a first rolling element 31 is arranged on a first support 22, and a second rolling element 32 is

arranged on a second support 26, in which[and] both rolling elements 31 are arranged spaced apart in the circumferential direction of the cylinder 02, in which[wherein] several dressings 01 can be arranged side-by-side, preferably in the axial direction, on the cylinder 02, in which[wherein] each dressing 01 has suspension legs 03a, 03b beveled off its ends, in which[wherein] the cylinder 02 has at least one opening 07 cut into its surface area 06, which opening 07[and] has a first wall 04 and a second wall 17, [wherein the cylinder 02 has at least one opening 07 cut into its surface area 06,] in which[wherein] the opening 07 leads to a channel 08 arranged in the cylinder 02 with a holding device with a holding member[means] 12 arranged in channel 08[therein], in which[wherein] the holding member[means] 12 of the holding device has a holding position and a release position as its operating positions, can also be distinguished by the following method steps:

[049] The first and second rolling elements 31, 32 are placed against all of the dressings 01 resting on the surface area 06 of the cylinder 02.

[050] The cylinder 02 rotates until the second rolling element 32 arranged on the

second support 26 is located above the opening 07 at the trailing end of a dressing 01 to be removed.

[051] The holding member[means] 12 of the holding device changes into its release position.

[052] The second rolling element 32 arranged on the second support 26 is moved away from the cylinder 02 at the trailing end of a dressing 01 to be removed. The, and the] suspension leg 03b at the trailing end of the dressing 01 to be removed is released from the opening 07 because of its internal tension, while the dressing 01 itself remains fixed in place on the surface area 06 of the cylinder 02 because of the pressure of the first rolling element 31. The trailing end of the dressing 01 to be removed tries to assume a stretched-out length, wherein this end of the dressing 01 now remains in contact with the second rolling element 32 over a defined spring travel while springing out of the opening 07. Therefore, the end of the dressing 01 springing out of the opening 07 follows the second rolling element 32 as it is being lifted off the cylinder 02. The suspension legs 03b of the remaining dressings 01 remain in the opening 07, because the ends of these dressings 01 remain pressed

against the surface area 06 of the cylinder 02 by the second[first] rolling element 32[31] assigned to them. The length of a released end of a dressing 01 to be removed from the cylinder 02 is defined by the distance of the contact point of the first rolling element 31[32] from the opening 07.

[053] The holding member[means] 12 of the holding device changes into its holding position, and all of the first and second rolling elements 31, 32, or at least the first rolling element 31 in front in the production direction P, can be moved away from the cylinder 02. Thereafter, if required after a rotation of the cylinder 02 counter to its production direction, the dressing 01 to be released can be removed from the surface area 06 of the cylinder 02.

[054] A method for bracing or tightening a flexible dressing 01 on a cylinder 02 of a printing press, with the aid of first and second rolling elements 31, 32, in which[wherein] a first rolling element 31 and a second rolling element 32 are provided, and in which both rolling elements 31, 32 are arranged spaced apart from each other in the circumferential direction of the cylinder 02. And in which[, wherein] several dressings 01 are arranged side-by-side in the axial direction of

cylinder 01 can also be distinguished in that the first and second rolling elements 31, 32 are individually or are in groups placed against the dressings 01 resting on the surface area 06 of the cylinder 02 or are moved away from the surface area 06 of cylinder 02[it].

[055] In another preferred[an] embodiment [variation] of the present invention, a method for pressing a dressing 01 against a cylinder 02 of a printing press with the aid of pressing elements 31, 32 is furthermore provided. Several[, wherein several] dressings 01 can be arranged side-by-side in the axial direction on the cylinder 02. A[, wherein a] pressing element 32 assigned to the dressing 01 to be pressed on to the cylinder 02 can be placed against or can be removed from the cylinder 02 independently of a pressing element 32 which is assigned to another dressing 01. These[, wherein these] pressing elements 32, assigned to the dressings 01, are arranged side-by-side in the axial direction of the cylinder 02. The[, which] method is distinguished in that at least one further dressing element 31, which is spaced apart from the above-described pressing element 32, in the circumferential direction of the cylinder 02, and which is arranged leading in the production

direction P of the cylinder 02, is placed against the dressing 01 to be pressed on.

In connection with this method, the pressing element 31, which is arranged leading in the production direction P of the cylinder 02 and which is to be placed against the dressing 01 to be pressed on, is preferably placed against the cylinder 02 at a time when the pressing element 31, arranged to be trailing, is located on an opening 07 cut into the cylinder 02, or close to this opening 07, as a result of a rotary movement of the cylinder 02. A, wherein a] suspension leg 03b at the end of the dressing 01 which trails, in the production direction P of the cylinder 02, is maintained in this opening 07. This is shown in Fig. 4.

[056] The pressing element 32, which is arranged to be trailing in the production direction P of the cylinder 02 and which has been placed against the dressing 01 to be pressed on cylinder 02, is preferably moved away from the cylinder 02 as soon as this pressing element 32 is located on an opening 07 cut into the cylinder 02, or close to this opening 07, as a result of a rotary movement of the cylinder 02. A, and a] holding member[means] 12, which holds a suspension leg 03b at the end of the dressing 01 which is trailing in the production direction P of the cylinder 02 in

this opening 07, changes[has changed] from its holding position into its release position. This is depicted in Fig. 5. Following the changing of the position of the holding member[means] 12 holding the suspension leg 03 in this opening 07, this suspension leg 03 can be released, preferably automatically, from the opening 07.

The further pressing element 31, which is arranged leading in the production direction P of the cylinder 02, preferably remains placed against the dressing 01 to be pressed until this pressing element 31 is positioned[located] on an opening 07 cut into the cylinder 02, or close to this opening 07, because of a rotary movement of the cylinder 02 directed counter to its production direction P. A[, wherein a] suspension leg 03a formed at the end of the dressing 01, which suspension leg 03a end leads in the production direction P of the cylinder 02, is maintained in this opening 07. Accordingly, the dressing 01 remains fixed in place on the cylinder 02 by the pressed on pressing element 31, that is arranged leading in the production direction P of the cylinder 02, until the suspension leg 03a[03] at the end of the dressing 01 which is arranged to lead in the production direction P of the cylinder 02 can be removed from the opening 07.

[057] A method for pressing a dressing 01 against a cylinder 02 of a printing press, in which[wherein] several dressings 01 can be arranged side-by-side on the cylinder 02 in its axial direction, can provide that at least one rolling element 32, which presses on a dressing 01 to be braced on the cylinder 02, is placed against the cylinder 02 at the start of the bracing process and is only moved away from the cylinder 02 at the termination of the bracing process. In the course of this, dressings 01 which have beveled suspension legs 03a, 03b at their ends, which beveled suspension legs 03a, 03b are provided for being suspended in a preferably slit- shaped opening 07 cut into the cylinder 02, are preferably used. At the start of the bracing or attachment process, the suspension leg 03a[03] at the end of the dressing 01 which leads in the production direction P of the cylinder 02 is suspended in the opening 07. At[, and at] the termination of the bracing process, the suspension leg 03b at the end which trails in the production direction P of the cylinder 02 is suspended in the opening 07. Advantageously a holding member[means] 12, which holds the suspension leg 03b at the end which trails in the production direction P of the cylinder 02, then changes from a release position

into a holding position. Preferably, the rolling element 32 is moved away from the cylinder 02 after the change of the holding member[element] 12 from its release position into its holding position. With this method, the cylinder 02 is rotated in its production direction P following the suspension of the suspension leg 03a, at the end of dressing 01 leading in the production direction P of the cylinder 02, in opening 07 until the suspension leg 03b at the end of dressing 01 trailing in the production direction P of the cylinder 02 can be suspended in opening 07.

Preferably, the rolling element 32, assigned to the dressing 01 to be braced or attached, is placed against the cylinder 02, or is moved away from the cylinder 02, independently of a rolling element 32 that is assigned to another dressing 01.

Preferably, several rolling elements 32, which are assigned to the dressings 01, are arranged side-by-side in the axial direction of the cylinder 02. It can be provided that, at the start of the bracing or dressing attachment process, that only the rolling element 32 assigned to the dressing 01 to be braced is placed against the latter.

[058] While preferred embodiments of a device and method for pressing a dressing to a cylinder of a printing machine by use of pressing elements, in

accordance with the present invention, have been set forth fully and completely hereinabove, it will be apparent to one of skill in the art that various changes in, for example, the overall sizes of the cylinder, the source of pressurized fluid for the actuating devices, and the like could be made without departing from the true spirit and scope of the present invention which is accordingly to be limited only by the appended claims.

WHAT IS CLAIMED IS:

[List of Reference Symbols

- 01 Dressing, printing forme
- 02 Cylinder, forme cylinder
- 03a,03b Suspension leg
- 04 Wall, first
- 05 -
- 06 Surface area
- 07 Opening
- 08 Channel
- 09 Bottom
- 10 -
- 11 Groove
- 12 Holding means, lever
- 13 Wall (08)
- 14 Spring element
- 15 -
- 16 Actuating means
- 17 Wall, second
- 18 -
- 19 -
- 20 -
- 21 Holder, cross arm
- 22 Support, first, resilient sheet metal piece
- 23 End, first (22)
- 24 End, second (22)
- 25 -
- 26 Support, second, resilient sheet metal piece
- 27 End, first (26)
- 28 End, second (26)
- 29 Stop]

- [30 -
- 31 Rolling element, first, pressing element, roll,
roller
- 32 Rolling element, second, pressing element,
roll, roller
- 33 Actuating element, first, tube
- 34 Actuating element, second, tube
- 35 -
- P Production direction]